
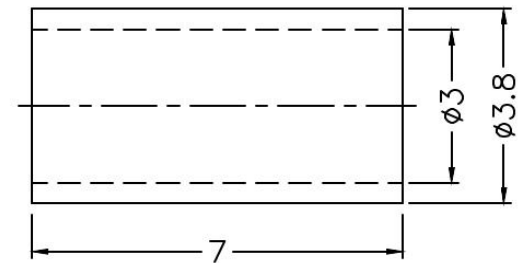
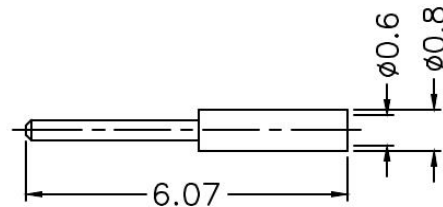



**PRODUCT: MMCX MALE CRIMP, FOR RG-174, RG-188A, RG-316, LMR-100**

**PRODUCT CODE: E3508, Paratronic Oy**

Description	Material	Note	General information	
Contact pin	Brass	1	Dimensions in millimeters (mm), unless otherwise specified. RoHS compliant. Directive 2015/863 with exemption 6(c)	Impedance 50 ohm Frequency range DC - 6 GHz, VSWR 1.20 max
Insulator	PTFE	-		
Retainer ring	Beryllium copper	2	Note, finish, plating thickness in micro-inches, $\mu$ in (minimum): 1. Gold (3) over nickel (50) over copper (50) 2. Thin gold over nickel (50) over copper (50) Hex crimp size: Ferrule 3.25mm (0.128"), pin to solder IP40	Insertion loss $\leq$ 0.3 dB Insulator resistance $\geq$ 1 G $\Omega$ Resistance, center contact $\leq$ 5 m $\Omega$ , outer c. $\leq$ 2.5 m $\Omega$ Test voltage 500 V rms, working voltage 175 V rms
Barrel	Brass	2		
Ferrule	Brass	2		
Body	Brass	2		

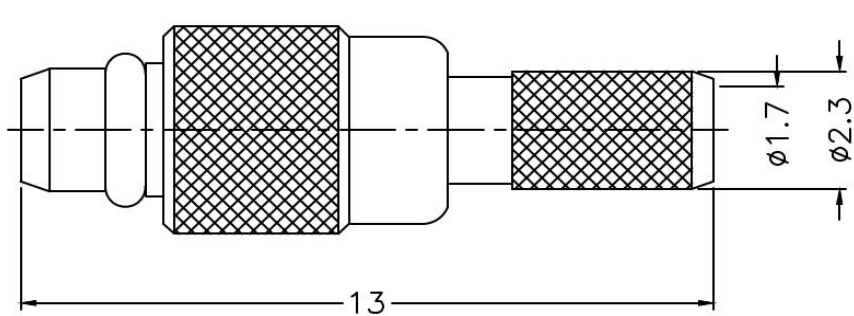

Cable stripping dimensions:

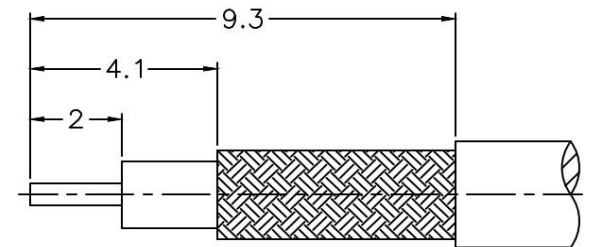

Title	Value
Drawing date	27.2.2023
Version	A
Website	www.paratronic.fi