


PRODUCT: UHF FEMALE TO UHF FEMALE ADAPTER

PRODUCT CODE: E3809, Paratronic Oy

| Description | Material | Note | General information | |
|-------------|----------|------|---|---|
| Contact pin | Brass | 1 | Dimensions in millimeters (mm), unless otherwise specified. RoHS compliant. Directive 2015/863 with exemption 6(c) Note, finish, plating thickness in micro-inches, μin (minimum): 1. Thin gold over nickel (50) over copper (50) 2. Nickel (100) over copper (50) | Impedance not defined Frequency range DC - 300 MHz Insulator resistance $\geq 5 \text{ G}\Omega$ Resistance, center contact $\leq 5 \text{ m}\Omega$, outer contact $\leq 5 \text{ m}\Omega$ Test voltage 2200 V rms, working voltage 750 V rms Power handling $\leq 400 \text{ W @ 300 MHz}$ |
| Insulator | PTFE | - | | |
| Body | Brass | 2 | | |
| Ring | Brass | 2 | | |
| | | | | |

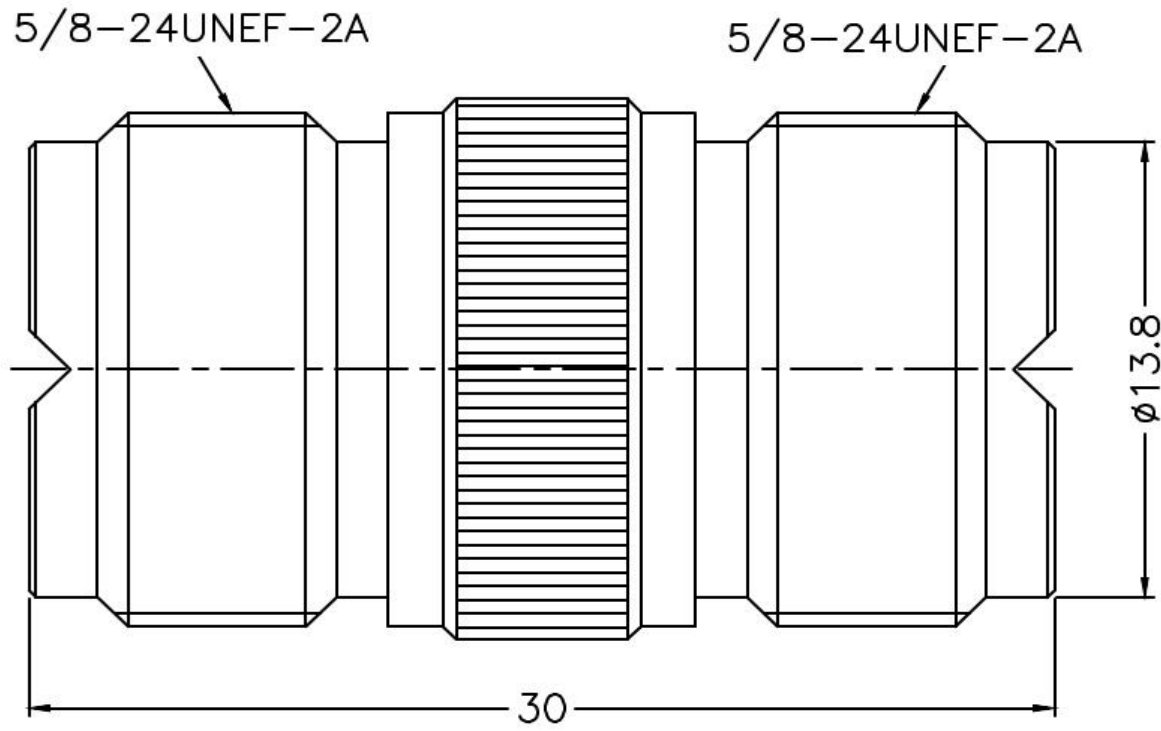

| Title | Value |
|--------------|--|
| Drawing date | 31.1.2023 |
| Version | A |
| Website | www.paratronic.fi |