


PRODUCT: MCX MALE CRIMP, FOR RD-316, RGD-316, RG-316D

PRODUCT CODE: E3563, Paratronic Oy

Description	Material	Note	General information	
Contact pin	Brass	1	Dimensions in millimeters (mm), unless otherwise specified. RoHS compliant. Directive 2015/863 with exemption 6(c) Note, finish, plating thickness in micro-inches, μ in (minimum): 1. Gold (3) over nickel (50) over copper (50) 2. Thin gold over nickel (50) over copper (50) Hex crimp size: Ferrule 3.84mm (0.151"), pin to solder IP40	Impedance 50 ohm Frequency range DC - 6 GHz, VSWR 1.20 max Insertion loss \leq 0.3 dB Insulator resistance \geq 1 G Ω Resistance, center contact \leq 5 m Ω , outer c. \leq 2.5 m Ω Test voltage 750 V rms, working voltage 335 V rms
Insulators	PTFE	-		
Body	Beryllium copper	2		
Housing	Brass	2		
Ferrule	Copper	2		

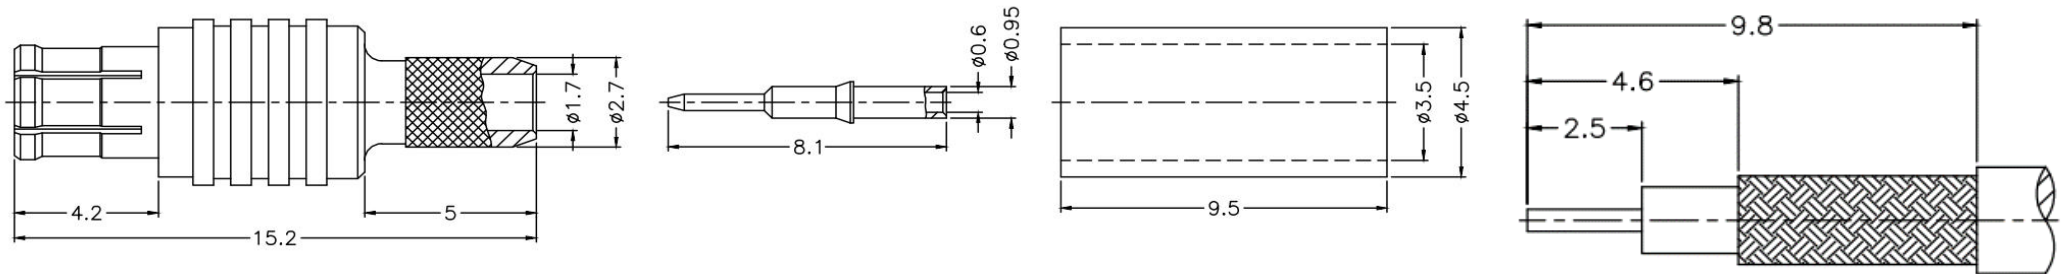

Title	Value
Drawing date	22.1.2023
Version	A
Website	www.paratronic.fi