
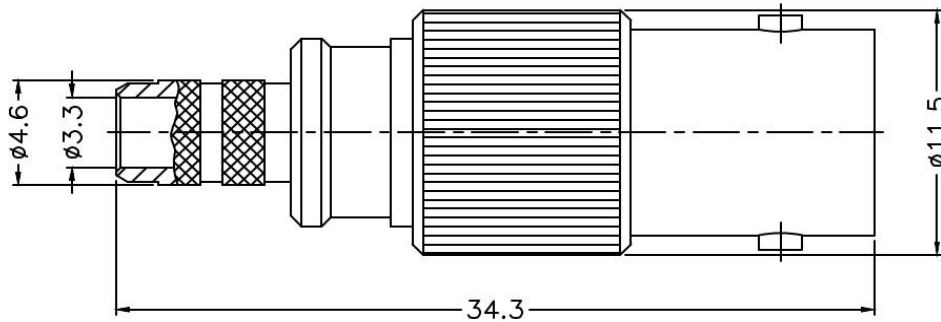




**PRODUCT: BNC FEMALE CRIMP, STRAIGHT, 50 OHM, FOR AIRCELL 5, LMR-200**

**PRODUCT CODE: E3723, Paratronic Oy**

Description	Material	Note	General information	
Contact pin	Phosphor bronze	1	Dimensions in millimeters (mm), unless otherwise specified. RoHS compliant. Directive 2015/863 with exemption 6(c) Note, finish, plating thickness in micro-inches, $\mu$ in (minimum): 1. Gold (3) over nickel (50) over copper (50) 2. Nickel (100) over copper (50)  Hex crimp size: Ferrule 5.41 mm / 0.213", pin 1.72 mm / 0.068" or solder IP67 when mated, IP40 unmated	Impedance 50 ohm Frequency range DC - 4 GHz VSWR 1.35 max Insertion loss $\leq 0.3$ dB Insulator resistance $\geq 5$ G $\Omega$ Resistance, center contact $\leq 1.5$ m $\Omega$ , outer c. $\leq 1$ m $\Omega$ Test voltage 1500 V rms, working voltage 400 V rms Power handling $\leq 80$ W @ 2 GHz
Insulator	POM	-		
Body	Brass	2		
Lock ring	Brass	2		
Ferrule	Copper	2		
Heat shrink	With glue	-		

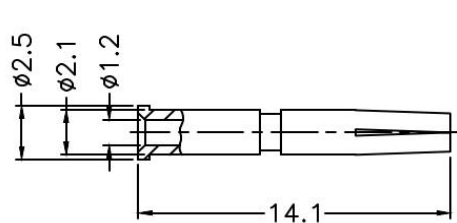

Cable stripping dimensions:

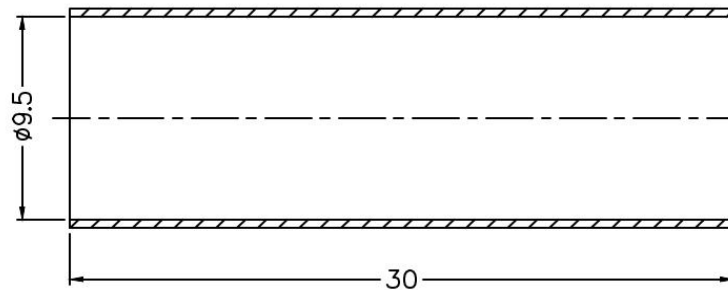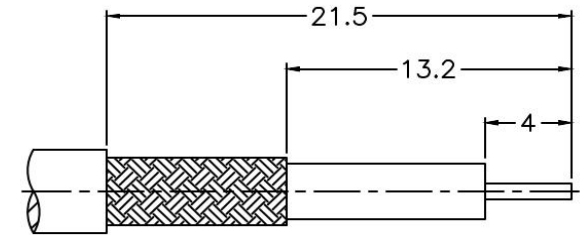

Title	Value
Drawing date	31.5.2023
Version	A
Website	www.paratronic.fi