


# PRODUCT: N FEMALE TO UHF MALE ADAPTER

PRODUCT CODE: E3859, Paratronic Oy

Description	Material	Note	General information	
Contact pin 1	Brass	1	Dimensions in millimeters (mm), unless otherwise specified.	Impedance not defined
Contact pin 2	Phosphor bronze	1		
Insulator	PTFE	-		
Body	Brass	2	RoHS compliant. Directive 2015/863 with exemption 6(c) Note, finish, plating thickness in micro-inches, $\mu\text{in}$ (minimum): 1. Thin gold over nickel (50) over copper (50) 2. Nickel (100) over copper (50) 3. Passivated	Frequency range DC - 300 MHz Insertion loss $\leq 0.3$ dB Insulator resistance $\geq 5$ G $\Omega$ Resistance, center contact $\leq 5$ m $\Omega$ , outer c. $\leq 5$ m $\Omega$ Test voltage 1000 V rms, working voltage 500 V rms Power handling $\leq 400$ W @ 300 MHz Mating cycles: 500 min.
Shell	Brass	2		
Retainer ring	SUS 304	3		
			Temperature range: -65 ... +165 °C	

5/8-24UNEF-2A

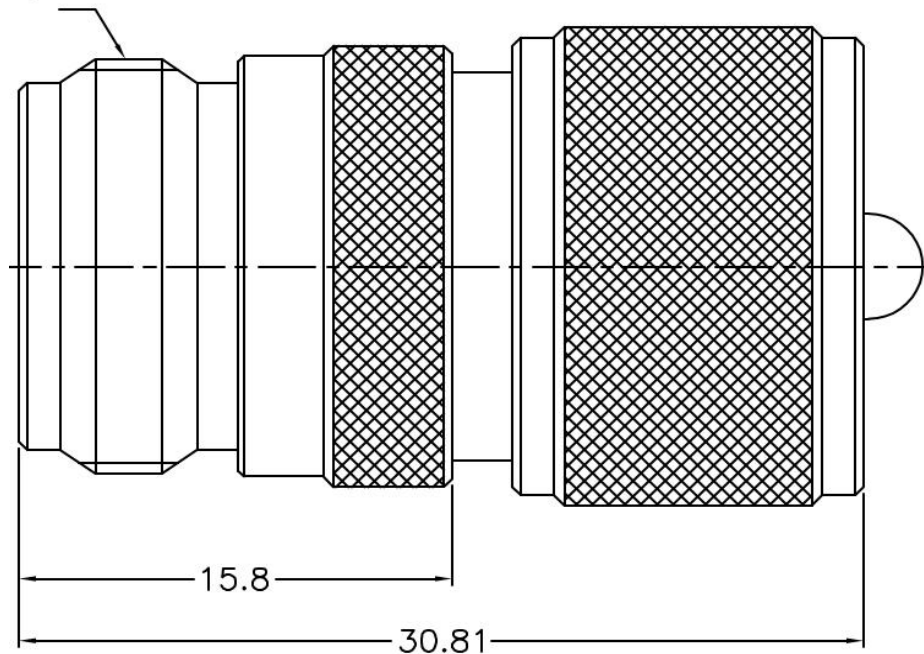

Title	Value
Drawing date	27.5.2025
Version	A
Website	www.paratronic.fi