

Ecoflex® 15 Plus

ultraflexible, low loss and suitable for use up to 8 GHz



Ecoflex 15 Plus has remarkably improved electrical and mechanical characteristics. The construction of the cable and the use of materials are optimized to achieve lowest attenuation values, higher max. frequency, high long-term stability and low weight, also allowing an easy installation.

Ecoflex 15 Plus is an extremely flexible, low loss 50 ohm coaxial cable for the frequency range up to 8 GHz. Advanced manufacturing techniques combined with the use of a low loss PE-LLC dielectric with a foaming rate of more than 70% result in very low attenuation values. The unique construction of Ecoflex 15 Plus combines the excellent attenuation properties of non-flexible solid inner conductor 1/2" cables with the high flexibility of cables manufactured with stranded inner conductors. So this cable represents an ideal combination. The high flexibility of Ecoflex 15 Plus results from a hybrid CCA inner conductor containing 7 stranded copper-clad aluminium wires. Each wire has an aluminium core covered by copper cladding which combines copper's good electrical conductivity and aluminium's light weight. During a special manufacturing process the inner conductor is continuously compressed, calibrated and then pre-coated to achieve good attenuation, good return loss values and stable impedance matching. Another advantage of Ecoflex 15 Plus is its double shielding: an overlapping copper foil and an additional shield braiding of bare copper wires with

75 % coverage ensure a high screening attenuation of > 90 dB at 1 GHz. The black PVC jacket of Ecoflex 15 Plus is UV-stabilized.

For the easier installation of this cable, we developed solderless connectors of the N, UHF and 7-16 DIN standards, which can be assembled in a short time without any special tools. Ecoflex 15 Plus is the right choice, when a highly flexible, light, low loss and microwave rated cable is required. It can be used for numerous RF applications.

Key features

| | |
|-----------------------------------|---------------|
| Diameter | 14,6 ± 0,3 mm |
| Impedance | 50 ± 2 Ω |
| Attenuation at 1 GHz/100 m | 9,80 dB |
| f max | 8 GHz |
| Euroclass acc. to EN 50575 | Eca |

Characteristics

Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
Flame retardant according to IEC 60332-1-2
RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
UV-resistant

Maahantuonti ja myynti:

PARATRONIC OY

Heikkiläntie 26, 63130 MÄYRY

Puh 0400 297526 paratronic@paratronic.fi

paratronic.fi

Technical data

| | |
|---------------------|--|
| Inner conductor | Hybrid CCA – stranded copper-clad aluminium wire |
| Inner conductor Ø | 4,5 mm (7 x 1,5 mm) |
| Dielectric | foamed Polyethylene (PE) with skin |
| Dielectric Ø | 11,3 mm |
| Outer conductor 1 | copper foil overlapped |
| Shielding factor | 100% |
| Outer conductor 2 | shield braiding of bare copper wires |
| Shielding factor | 75% |
| Outer conductor Ø | 12,1 mm |
| Jacket | PVC black, UV-resistant |
| Weight | 167 kg/km |
| Min. Bending radius | 4XØ single, 8XØ repeated |
| Temperature range | -55 to +85°C Transport & fixed installation -40 to +85°C Flexible use |
| Pulling strength | 1300 N |

Electrical data at 20°C

| | |
|-------------------------------|------------|
| Capacity (1 kHz) | 78 nF/km |
| Velocity factor | 0,85 |
| Screening attenuation 1 GHz | ≥ 90 dB |
| DC-resistance Inner conductor | ≤ 2,5 Ω/km |
| DC-resistance Outer conductor | 5,0 Ω/km |
| Insulation resistance | ≥ 10 GΩ*km |
| Test voltage DC (wire/screen) | 7 kV |
| Max. Voltage | 5 kV |

| | Ecoflex 15 Plus | RG 213/U | RG 58/U |
|-----------------------|-----------------|----------|----------|
| Capacity | 78 pF/m | 101 pF/m | 102 pF/m |
| Velocity factor | 0,85 | 0,66 | 0,66 |
| Attenuation (dB/100m) | | | |
| 10 MHz | 0,86 | 2,00 | 5,00 |
| 100 MHz | 2,81 | 7,00 | 17,00 |
| 500 MHz | 6,70 | 17,00 | 39,00 |
| 1000 MHz | 9,80 | 22,50 | 54,60 |
| 3000 MHz | 18,30 | 58,50 | 118,00 |


Typ. Attenuation (db/100 m at 20°C)

| | | | |
|---------|------|----------|-------|
| 5 MHz | 0,60 | 1000 MHz | 9,80 |
| 10 MHz | 0,86 | 1296 MHz | 11,40 |
| 50 MHz | 1,96 | 1500 MHz | 12,40 |
| 100 MHz | 2,81 | 1800 MHz | 13,80 |
| 144 MHz | 3,40 | 2000 MHz | 14,60 |
| 200 MHz | 4,05 | 2400 MHz | 16,20 |
| 300 MHz | 5,00 | 3000 MHz | 18,30 |
| 432 MHz | 6,10 | 4000 MHz | 21,60 |
| 500 MHz | 6,70 | 5000 MHz | 24,60 |
| 800 MHz | 8,60 | 6000 MHz | 27,50 |
| | | 8000 MHz | 32,70 |

Max. Power handling (W at 40°C)

| | | | |
|----------|-------|----------|-----|
| 10 MHz | 5.021 | 2400 MHz | 270 |
| 100 MHz | 1.542 | 3000 MHz | 236 |
| 500 MHz | 655 | 4000 MHz | 198 |
| 1000 MHz | 446 | 5000 MHz | 173 |
| 2000 MHz | 300 | 6000 MHz | 154 |
| | | 8000 MHz | 129 |

Typ. Attenuation (db/100 m at 20°C)

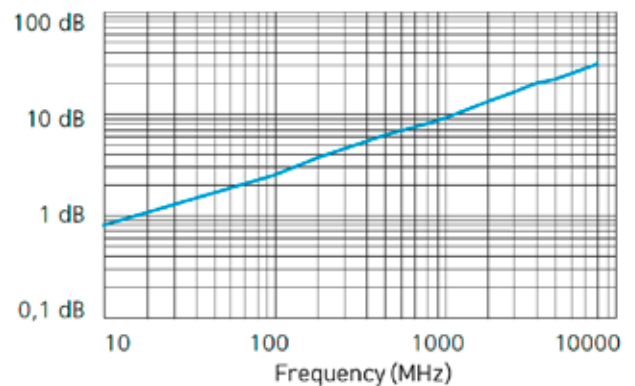

Typ. Return loss

